

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau(43) International Publication Date  
8 July 2004 (08.07.2004)


PCT

(10) International Publication Number  
WO 2004/056284 A1

- (51) International Patent Classification<sup>7</sup>: A61C 8/00, Ingvar [SE/SE]; Ändergatan 3, ., S-431 69 MÖLNDALE (SE).  
A61F 2/28
- (21) International Application Number: PCT/SE2003/002014 (74) Agents: GROTH & CO. KB et al.; ., P. O. Box 6107, S-102 32 Stockholm (SE).
- (22) International Filing Date: 18 December 2003 (18.12.2003) (81) Designated States (*national*): AE, AG, AI., AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (25) Filing Language: Swedish
- (26) Publication Language: English
- (30) Priority Data: 0203787-7 19 December 2002 (19.12.2002) SE
- (71) Applicant (*for all designated States except US*): EXOPRO L.A [BR/BR]; Rue Herminio Pinto N 8-65, Vila Santa Antonio, Brazil, ., S.P 17013-201 BAURU (BR).
- (72) Inventor; and (84) Designated States (*regional*): ARIPO utility model (BW), ARIPO patent (BW), ARIPO utility model (GH), ARIPO patent (GH), ARIPO utility model (GM), ARIPO patent (GH), ARIPO utility model (GM), ARIPO patent (GH).
- (75) Inventor/Applicant (*for US only*): BRÄNEMARK, Per-

[Continued on next page]

(54) Title: A FIXTURE

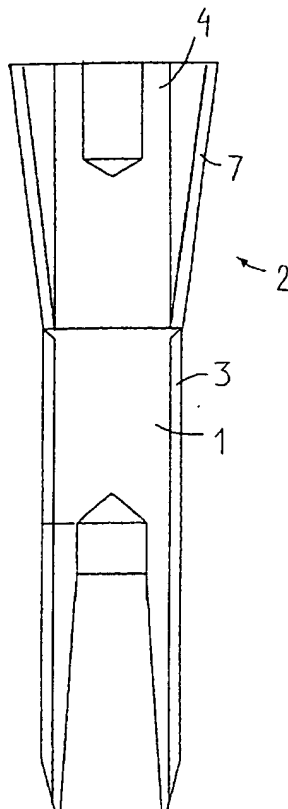

(57) **Abstract:** The present invention relates to a fixture for anchoring in bone tissue. The fixture has a fixture anchoring portion (1) and an application portion (2) intended for connection to a prosthesis. The application portion (2) has an outer end and an end connected to the anchoring portion (1). According to the invention, the application portion (2) includes a flared part (7) whose outer dimensions widen from the end of said part (7) connected to the anchoring portion (1) in a direction towards the outer end of the application portion (2). This flared part (7) is elastically resilient transversely to the longitudinal direction of the fixture. The invention also relates to the use of such a fixture for securing the application of a prosthesis.